


cnPilot e400 smart WiFi professioneel acces point 100 (79,99 EUR)



cnPilot™ E400 Indoor Access Point

Designed for wireless service providers of both enterprise and distributed enterprise networks, cnPilot™E400 offers WLAN that is scalable, secure, and reliable. The enterprise-grade 802.11ac access points support on-premise or cloud management in a solution that rolls out quickly, blends in to the environment and is easy to operate.

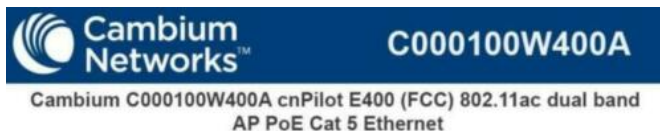

Locatie

Limburg, Sittard

<https://www.advertentiex.nl/x-1288143-z>



EXPANDING THE ENTERPRISE.

Designed for wireless service providers of both enterprise and distributed enterprise networks, cnPilotE400 offers WLAN that is scalable, secure, and reliable. The enterprise-grade 802. 11ac access points support on-premise or cloud management in a solution that rolls out quickly, blends in to the environment and is easy to operate.

Cloud Management: backed by Cambiums cnMaestro cloud manager offering end to end visibility of the network and customer devices

Out-of-the box zero touch onboarding

Stateful alarms and dashboard views

Multiple management options available including cloud-based,

SNMP and an enriched set of RESTful interfaces

End-to-end Troubleshooting: Single dashboard view

and rich statistics ensure rapid root cause detection

and issue resolution

One-click functionality reveals the health of all network nodes related to the problem area



cnPilot	e400	smart	WiFi
professioneel	acces	point	100



<https://www.advertentix.nl/x-1288143-z>



<https://www.advertentix.nl/x-1288143-z>



<https://www.advertentix.nl/x-1288143-z>



Onb Sec Sup Sc for
<https://www.adventicentix.nl/x-1288>
 143-z



<https://www.advententix.nl/x-1288>




<https://www.advententix.nl/x-1288143-5>



<https://www.advertentix.nl/x-1288143-z>



<https://www.advertentiax.nl/x-1288143-z>



<https://www.advertentiax.nl/x-1288143-z>

KEY FEATURES:

802. 11ac concurrent dual band

2x2 MIMO

16 SSIDs supporting 256 concurrent users

Cloud managed with no on-site controller required

On-board captive portal

Rate limiting per SSID and client

Fast roaming across access points (AP)

Auto channel selection for allocation of wireless