
Activariantic X nl

PATTON SmartNod Multi-Port ISDN IAD

Locatie **Gelderland, Winterswijk** https://www.advertentiex.nl/x-1590240-z



The Patton SmartNode 4638




The available 3 and 5 BRI/So port configurations fit the requirements of small and medium enterprises looking for a cost-efficient way to network PBX systems on multiple sites or connect to a public Internet telephony service.

Features & Benefits

3/5 Ports Quality ISDN VoIP - 3 or 5 ISDN BRI So ports, 4 or 8 low-bandwidth voice or T.38 fax calls. Advanced adaptive traffic management and shaping for maximum voice quality. Voice prioritization and DownStreamQoSFull Telephony Features - SessionRouter allows flexible call routing and numbering plan adaptations, CLIP/CLIR, hold, transfer, and much more.Management & Provisioning - Web-based management, SNMP, command line interface, & auto-provisioning for automated configuration & SW upgrades.Complete Access Routing - Two 10/100 Ethernet ports with auto MDI-X. Access router with NAT, Firewall, PPPoE, DHCP, DynDNS & VPN with IPSecFull VoIP protocol support - SIPv2, H.323v4, MGCP/IUA, ISDN, DSS1, QSIG, T.38, fax and modem bypass, DTMF relay.Outstanding Interoperability -



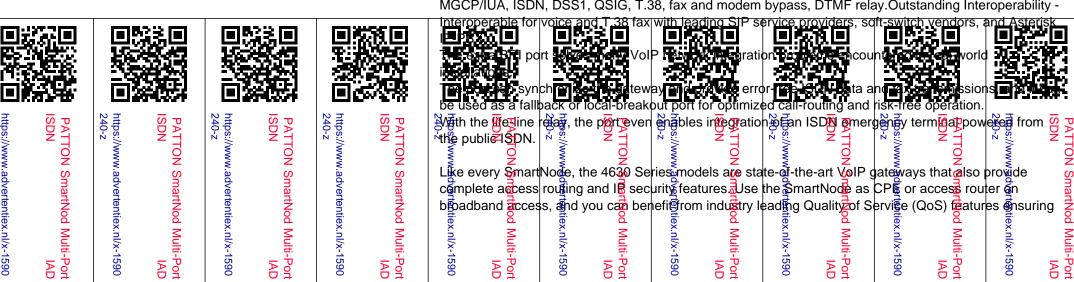

a voice quality unmatched by any IP-phone or gateway on the market.

The SmartNode 4630 is the solution for service providers and network integrators looking for a VoIP product that matches up to ISDN standards in terms of features and quality.

SmartNode products provide seamless network integration, continuous trouble-free operation and cost effective deployment to protect your investments for the.