



Ubiquiti UniFi Switch US-48-500W

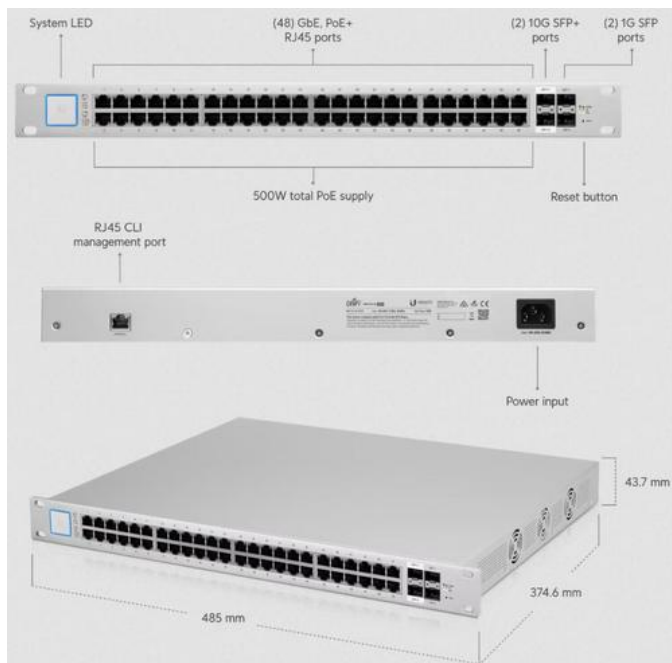

Locatie **Utrecht**
<https://www.advertentieX.nl/x-1984458-z>

Management interface Ethernet In-Band
 (1) RJ45 Serial port Out-of-Band
 Networking interface (48) GbE RJ45 ports
 (2) 1G SFP ports
 (2) 1/10G SFP+ ports
 PoE interface (48) PoE/PoE+ (Pins 1, 2+; 3, 6-)
 24V DC passive PoE (Pins 4, 5+; 7, 8-)
 Total non-blocking throughput 70 Gbps
 Switching capacity 140 Gbps
 Forwarding rate 104.16 Mpps
 Power method Universal input, 100—240V AC, 50/60 Hz
 Power supply AC/DC, internal, 500W
 Supported voltage range 100—240V AC
 Max. power consumption Excluding PoE output: 64W
 Including PoE output: 500W
 Total available PoE 500W
 Max. PoE wattage per port by PSE 24V Passive PoE: 17W
 PoE+: 34W
 Voltage range PoE mode 24V Passive PoE: 20—27V
 PoE+: 50—57V

ESD/EMP protection Air: ± 24kV, contact: ± 24kV

 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z	 Ubiquiti UniFi Switch US-48-500W https://www.advertentieX.nl/x-1984458-z
--	---	---	---	--	---	---	---	---	---

Ambient operating temperature -5 to 40° C (23 to 104° F)
Ambient operating humidity 5 to 95% noncondensing
Certifications CE, FCC,