

Diamond Audio D7056 6-kanaals versterker sound quality (500 EUR)



Locatie **Noord-Holland, Alkmaar**
<https://www.advertentieux.nl/x-580805-z>

Te koop Diamond Audio D7056; 6-kanaals sg-versterker

De diamond Audio D7056 is een versterker met ongekennde geluidskwaliteit, naar deze versterker luisteren is telkens weer een genot. Met deze versterker heb je ook alle filtermogelijkheden die je maar kunt wensen, alle kanalen zijn low-pass, band-pass of high-pass te filteren en in te stellen tussen de 50 en 5000 Hz, ook zijn de filters geheel uit te schakelen.

De specs van de versterker:

POWER RATING

- 6 x 50W @ 4 Ohm Stereo
- 6 x 100W @ 2 Ohm Stereo
- 3 x 200W Bridged @ 4 Ohms


SPECIFICATIONS

- Frequency Response: 3 50,000 Hz
- Signal-to-Noise Ratio: 102dB
- THD: 0.02%
- Channel Separation: 80dB
- Input Sensitivity: .5 to 12VRMS

- | | |
|--|---|
| <p>- Input Impedance: >40kOhms</p>  <p>- Fully Openable Case: 10 - 6mm</p>  <p>- Power Supply SPECS: 5VDC</p>  <p>- Channels: (1 for 1-1.5kHz CUT, 1 for 1-1.5kHz INPUT, 1 for 1-1.5kHz OUTPUT)</p>  <p>- Type: Fully Independent and Selectable Highpass, Lowpass, Bandpass or All-pass</p>  <p>- Slope: 18dB/Octave</p>  <p>- Alignment: Butterworth</p>  | <p>Diagrams</p> <p>quality</p> <p>6-kan</p> <p>https://</p> <p>05-z</p> |
|--|---|

TECHNICAL

- Symmetrical Topology, Fully Regulated, Triple Split-Rail Power Supply
- Isolated Input Section Utilizing "Quasi-Differential" Instrumentation Amplifier Technology

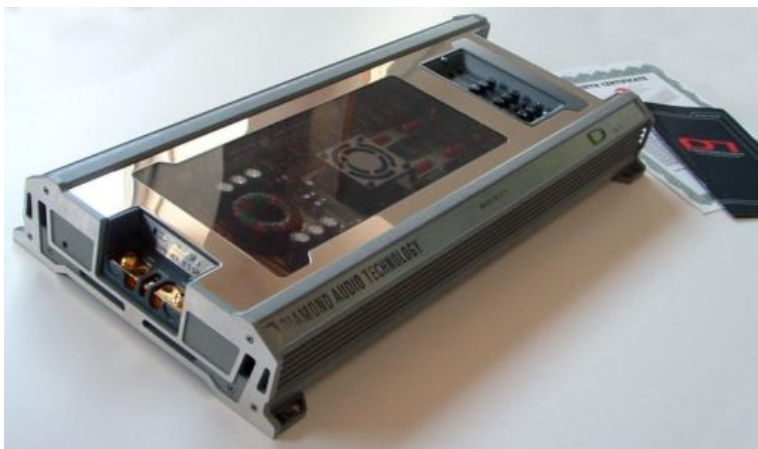

Diamond Audio D7056
-kanaals versterker sound
uality



Diamond Audio D7056
6-kanaals versterker sound
quality



Diamond Audio D7056
6-kanaals versterker sound
quality




Diamond Audio D7056
6-kanaals versterker sound
quality




Technical

- Symmetries
- Isolated imp



6-kanaals vestingker sound
Diamond Duo D7056
quality
www.adonix.nl/x-5808
erworth
ology, Fully
ection Utilizing



https://www.adb.org/press/2015-05-27-05-z



6-kanaals versterker sound quality
Dinno D/1030
https://www.audiofidelity.nl/x-5808
05-z



<https://www.advertentiax.nl/x-5808-05-z>



6-kanaals versterker sound
quality

-
- Up to 12VRMS Input Signal Voltage Capability (with -12dB Attenuator)
 - Third-Order 18dB/Octave Butterworth Crossover Topology
 - Wide Bandwidth/Low Distortion Symmetrical Gain Output Stage
 - 3 oz. Gold Plated Copper Circuit Board
 - High Efficiency Forced-Air Cooling System
 - Massive 3-Piece Proprietary Heatsink
 - Solid Copper High-Current Power Distribution Busbars

CONVENIENCE/ APPEARANCE

- Three 3-Way Fully Variable And Independent Electronic Crossovers in Top-Mount Configuration With Supplied Plexiglass Security Cover
- Assignable Crossover Inputs
- 24-Karat Gold Plated Solid Brass Circuit Board Mounted 4 Gauge Direct or Ring Terminal Power/Ground Connector Blocks
- 24-Karat Gold Plated Solid Brass Circuit Board Mounted 10 Gauge Direct or Banana Plug Direct Speaker Connectors
- Tinted Plexiglas Circuit Board Viewing Panel
- Solid Billet CNC Machined End Panels with Adjustable
- Mounting Flanges

DIMENSIONS

- Length: 22 3/4"
- Width: 10 5/8"
- Height: 3;